

CODE

MULTI8

MULTI OUTDOOR PARK 8



RAL 7016/9006

PRODUCT DESCRIPTION

MULTI OUTDOOR PARK 8 is equipped with Multiring (L=3.2 m), 2 Narrow ladders (L=3.2 m, H=2.5 m), Bar with wheels (L=3.2 m, H=2.1–2.45 m), Tarzan lianas (L=3.2 m, H max = 2.4 m).

Perfect for agility and endurance training, as an obstacle course. The 16.5-meter-long structure ensures continuity of the course, a variety of grips, and smooth transitions between elements.

SUPPORTING STRUCTURE

Main steel profile 80 × 80 mm with a wall thickness of 3 mm, ensuring both static and dynamic stability of the set.

BAR SYSTEM

Steel pipes with diameters $\phi 60,3$, $\phi 42,4$, $\phi 33,7$, $\phi 26,9$ mm and wall thickness of 3.2 mm and 2.3 mm providing optimal grip and durability.

ANTI-CORROSION PROTECTION

Two-stage process: epoxy primer and polyester topcoat. Laboratory-tested powder coating technology with increased corrosion resistance.

KEY SPECIFICATIONS

HIC MAX:	150 cm
DIMENSIONS	1657 x 150 x 250 cm
SAFETY ZONE	19,57 x 4,50 m
USER HEIGHT	>140 cm
MAX USER WEIGHT	150 kg
TOTAL SURFACE	88 m ²

FINISHING DETAILS

Corrugated aluminum steps, rubber shock-absorbing bumpers, seats made of UV-resistant HDPE boards, and handles compliant with REACH standards.

INSTALLATION AND FOUNDATIONS

Installation on B25 concrete foundations with a minimum depth of 50 cm.


ADDITIONAL INFORMATION

Durable TRAINER logo and manufacturer plate with the device serial number. Compliance with standard: EN 16630:2015-06

CODE

MULTI8


SAFETY ZONE

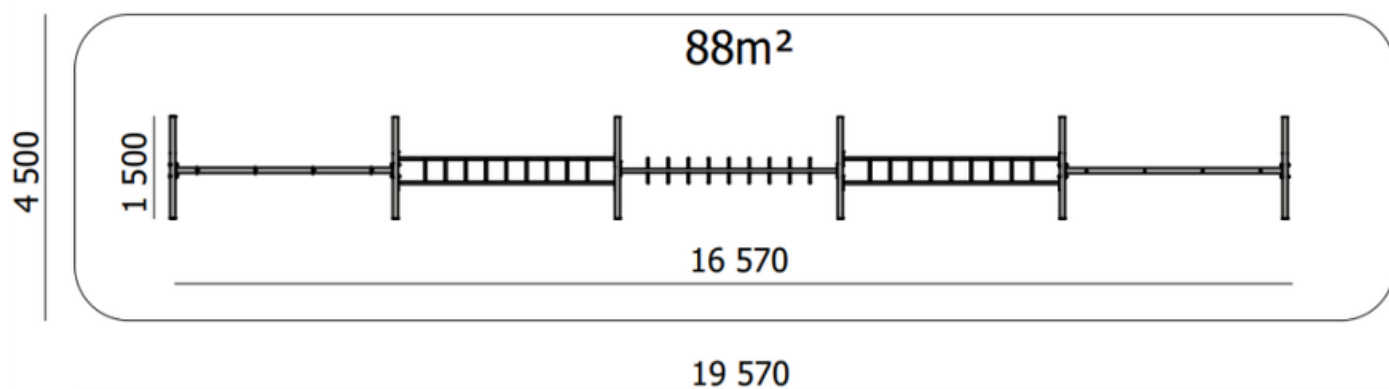


CODE

MULTI8

INSTALLATION




Multi Outdoor Park 8

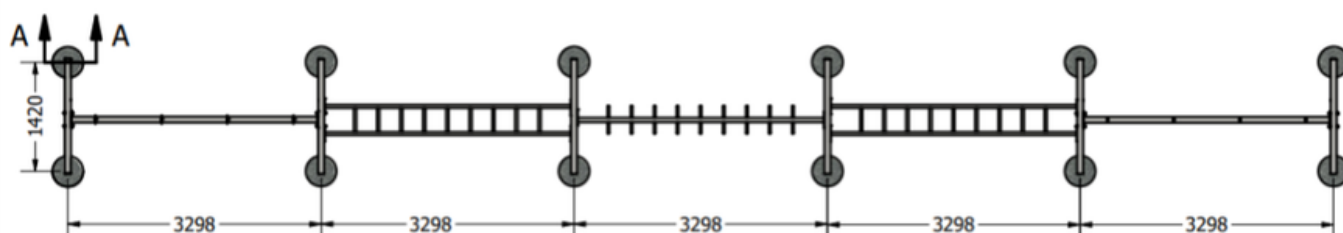

MULTI8

HEIGHT

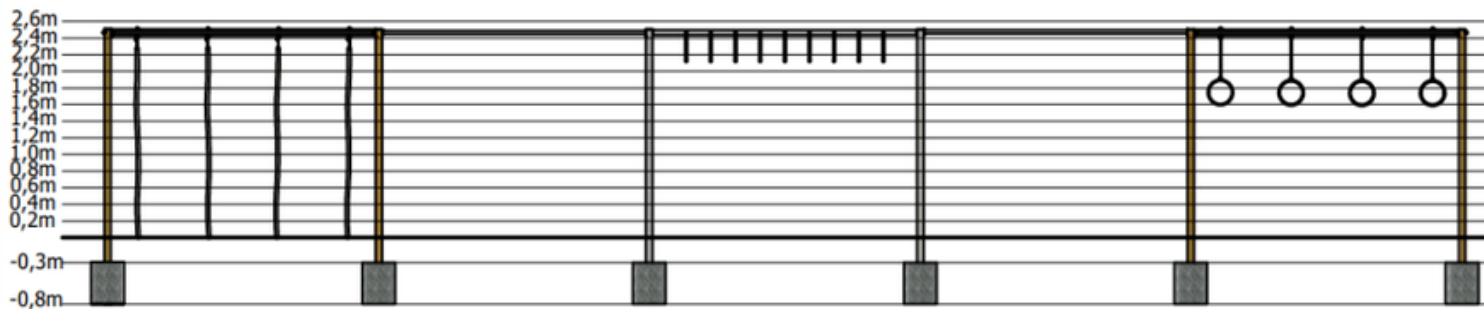

MULTI8

SET INCLUDES:

