

CODE

MULTI4

MULTI OUTDOOR PARK 4



RAL 7016/9006

PRODUCT DESCRIPTION

MULTI OUTDOOR PARK 4 is equipped with 8 horizontal bars (L= 1,25m-2m, H= 1,4m-2,2m), Gymnastic rings (H=2.5 m), Stick with snake (L=2 m, H=1.9 m) Bar with wheels (L=2 m, H=2 m), Tarzan lianas, Narrow ladders (L=2 m, H=2.5 m), Multiring, Ladder with boom (H=2.5 m). It's perfect for strength and obstacle course training.

SUPPORTING STRUCTURE

Main steel profile 80 × 80 mm with a wall thickness of 3 mm, ensuring both static and dynamic stability of the set.

BAR SYSTEM

Steel pipes with diameters $\phi 60,3$, $\phi 33,7$, $\phi 26,9$ mm and wall thickness of 3.2 mm and 2.3 mm, providing optimal grip and durability.

ANTI-CORROSION PROTECTION

Two-stage process: epoxy primer and polyester topcoat. Laboratory-tested powder coating technology with increased corrosion resistance:

KEY SPECIFICATIONS

| | |
|-----------------|--------------------|
| HIC MAX: | 150 cm |
| DIMENSIONS | 910 x 651 x 250 cm |
| SAFETY ZONE | 12,10 x 9,51 m |
| USER HEIGHT | >140 CM |
| MAX USER WEIGHT | 150 kg |
| TOTAL SURFACE | 115 m ² |

FINISHING DETAILS

Corrugated aluminum steps, rubber shock-absorbing bumpers, seats made of UV-resistant HDPE boards, and handles compliant with REACH standards.

INSTALLATION AND FOUNDATIONS

Installation on B25 concrete foundations with a minimum depth of 50 cm.


ADDITIONAL INFORMATION

Durable TRAINER logo and manufacturer plate with the device serial number. Compliance with standard: EN 16630:2015-06

CODE

MULTI4


SAFETY ZONE

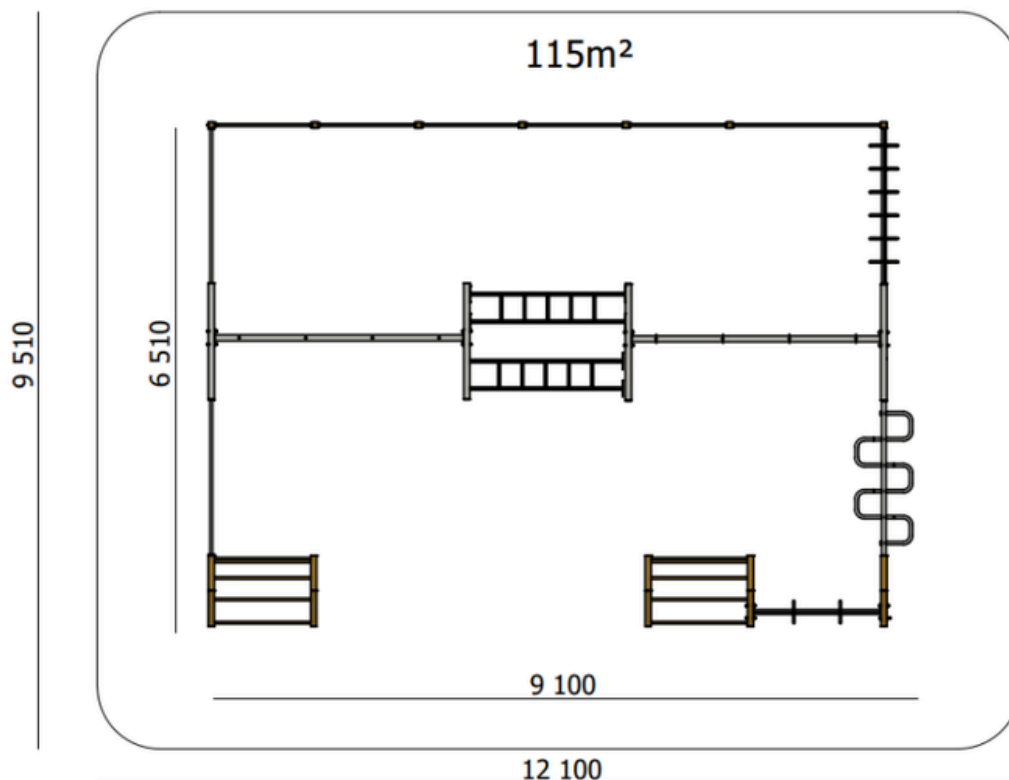

CODE

MULTI4


INSTALLATION

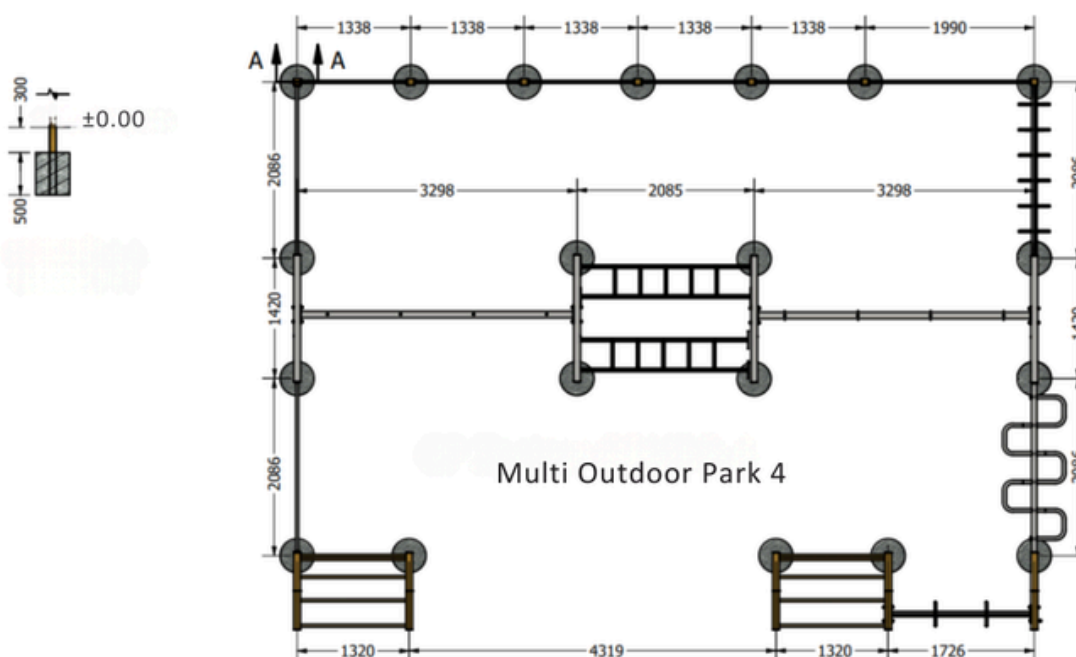

CODE

MULTI4

HEIGHT

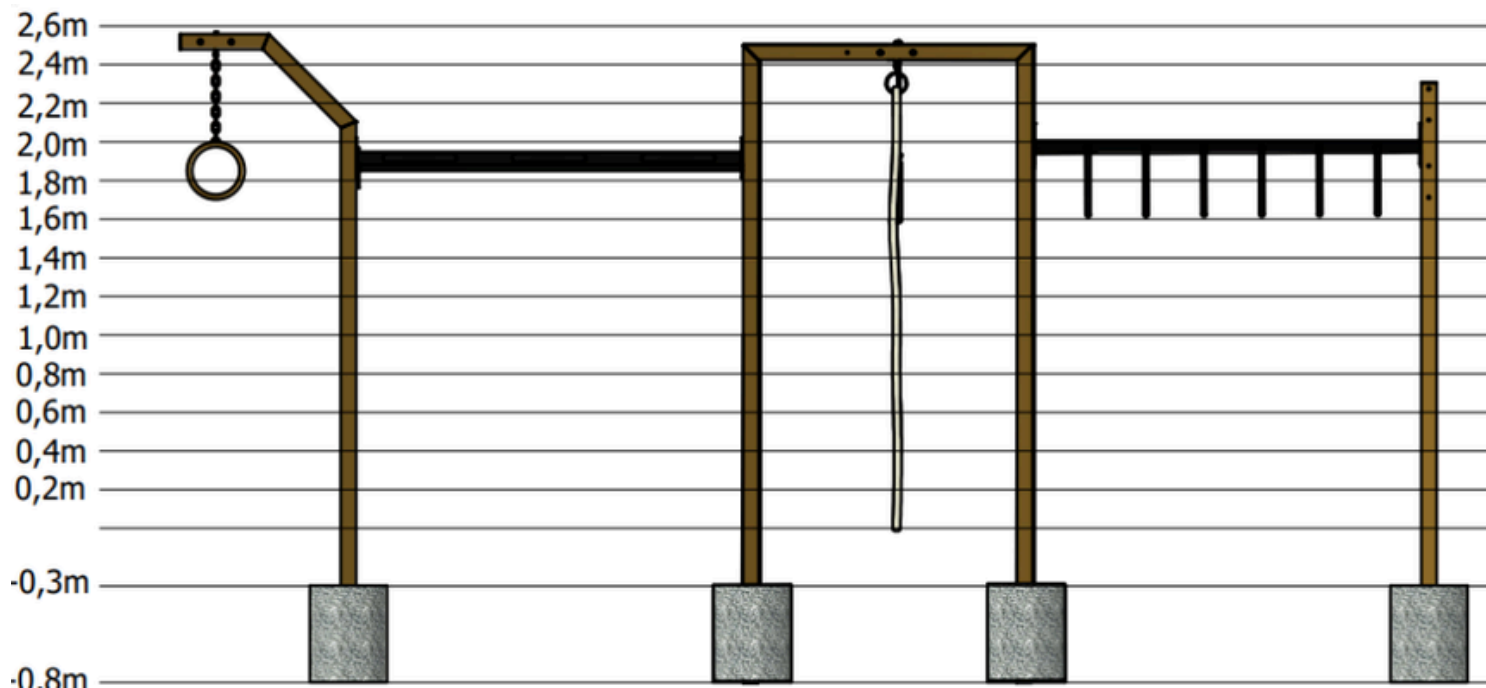

CODE

MULTI4

HEIGHT

